

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 924 065 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**14.05.2003 Bulletin 2003/20**

(51) Int Cl.<sup>7</sup>: **B41C 1/10**

(21) Application number: **98204092.5**

(22) Date of filing: **04.12.1998**

(54) **A heat sensitive non-ablatable wasteless imaging element for providing a lithographic printing plate**

Rückstandsfreies Aufzeichnungselement ohne Materialabtragung für die Herstellung von  
Flachdruckplatten

Élément pour l'enregistrement de l'image sans ablation et sans résidu pour la fabrication de plaques  
lithographiques

(84) Designated Contracting States:  
**BE DE FR GB**

(30) Priority: **19.12.1997 EP 97204045**

(43) Date of publication of application:  
**23.06.1999 Bulletin 1999/25**

(73) Proprietor: **AGFA-GEVAERT**  
**2640 Mortsel (BE)**

(72) Inventors:  
• **Van Damme, Marc**  
**2640 Mortsel (BE)**

• **Vermeersch, Joan**  
**2640 Mortsel (BE)**  
• **Hendrikx, Peter**  
**2640 Mortsel (BE)**  
• **Van Aert, Huub**  
**2640 Mortsel (BE)**

(56) References cited:  
**GB-A- 2 203 438** **US-A- 4 034 183**  
**US-A- 4 081 572**

• **PATENT ABSTRACTS OF JAPAN** vol. 009, no.  
**294 (M-431), 20 November 1985 & JP 60 132760**  
**A (ASAHI KASEI KOGYO KK), 15 July 1985**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 924 065 B1**

## Description

## FIELD OF THE INVENTION

- 5 [0001] The present invention relates to a heat sensitive non-ablatable wasteless imaging element.  
 [0002] More specifically the invention is related to a heat sensitive non-ablatable wasteless imaging element for preparing a lithographic printing plate which requires no dissolution processing.

## BACKGROUND OF THE INVENTION

- 10 [0003] Lithography is the process of printing from specially prepared surfaces, some areas of which are capable of accepting lithographic ink, whereas other areas, when moistened with water, will not accept the ink. The areas which accept ink define the printing image areas and the ink-rejecting areas define the background areas.
- 15 [0004] In the art of photolithography, a photographic material is made imagewise receptive to oily or greasy inks in the photo-exposed (negative-working) or in the non-exposed areas (positive-working) on a hydrophilic background.
- [0005] In the production of common lithographic printing plates, also called surface litho plates or planographic printing plates, a support that has affinity to water or obtains such affinity by chemical treatment is coated with a thin layer of a photosensitive composition. Coatings for that purpose include light-sensitive polymer layers containing diazo compounds, dichromace-sensitized hydrophilic colloids and a large variety of synthetic photopolymers. Particularly diazo-sensitized systems are widely used.
- 20 [0006] Upon imagewise exposure of the light-sensitive layer the exposed image areas become insoluble and the unexposed areas remain soluble. The plate is then developed with a suitable liquid to remove the diazonium salt or diazo resin in the unexposed areas.
- [0007] Alternatively, printing plates are known that include a photosensitive coating that upon image-wise exposure is rendered soluble at the exposed areas. Subsequent development then removes the exposed areas. A typical example of such photosensitive coating is a quinone-diazide based coating.
- 25 [0008] Typically, the above described photographic materials from which the printing plates are made are exposed in contact through a photographic film that contains the image that is to be reproduced in a lithographic printing process. Such method of working is cumbersome and labor intensive. However, on the other hand, the printing plates thus obtained are of superior lithographic quality.
- [0009] Attempts have thus been made to eliminate the need for a photographic film in the above process and in particular to obtain a printing plate directly from computer data representing the image to be reproduced. However the above mentioned photosensitive coatings are not sensitive enough to be directly exposed to a laser. Therefore it has been proposed to coat a silver halide layer on top of the photosensitive coating. The silver halide can then directly be exposed by means of a laser under the control of a computer. Subsequently, the silver halide layer is developed leaving a silver image on top of the photosensitive coating. That silver image then serves as a mask in an overall exposure of the photosensitive coating. After the overall exposure the silver image is removed and the photosensitive coating is developed. Such method is disclosed in for example JP-A- 60- 61 752 but has the disadvantage that a complex development and associated developing liquids are needed.
- 35 [0010] GB- 1 492 070 discloses a method wherein a metal layer or a layer containing carbon black is provided on a photosensitive coating. This metal layer is then ablated by means of a laser so that an image mask on the photosensitive layer is obtained. The photosensitive layer is then overall exposed by UV-light through the image mask. After removal of the image mask, the photosensitive layer is developed to obtain a printing plate. This method however still has the disadvantage that the image mask has to be removed prior to development of the photosensitive layer by a cumbersome processing.
- 45 [0011] Furthermore methods are known for making printing plates involving the use of imaging elements that are heat-sensitive rather than photosensitive. A particular disadvantage of photosensitive imaging elements such as described above for making a printing plate is that they have to be shielded from the light. Furthermore they have a problem of sensitivity in view of the storage stability and they show a lower dot crispness. The trend towards heat mode printing plate precursors is clearly seen on the market.
- 50 [0012] EP-A- 444 786, JP- 63-208036, and JP- 63-274592 disclose photopolymer resists that are sensitized to the near IR. So far, none has proved commercially viable and all require wet development to wash off the unexposed regions. EP-A- 514 145 describes a laser addressed plate in which heat generated by the laser exposure causes particles in the plate coating to melt and coalesce and hence change their solubility characteristics. Once again, wet development is required.
- 55 [0013] A somewhat different approach is disclosed in US-P- 3 787 210, US-P- 3 962 513, EP-A- 001 068 and JP- 04-140191. Heat generated by laser exposure of a donor sheet is used to physically transfer a resinous material from the donor to a receptor held in intimate contact with the donor. Provided the receptor surface has suitable hydrophilic

properties, it can then be used as a printing plate. This method has the advantage of not requiring wet processing, but in order to achieve realistic write-times, a high power YAG (or similar) laser is required, which has restricted the usefulness of the method

[0014] On the other hand polymer coatings which undergo a change in surface properties in response to light exposure are known in the art. WO- 92/09934 discloses imaging elements including coatings that become hydrophilic as a result of irradiation, and WO- 92/02855 describes coatings that become tacky as a result of irradiation. In both cases, the coatings comprise an acid-sensitive polymer and a photochemical source of strong acid, and in both cases the preferred acid-sensitive polymer is derived from a cyclic acetal ester of acrylic or methacrylic acid, such as tetrahydropyranyl (meth)acrylate.

[0015] WO- 92/02855 discloses that the acid-sensitive polymer is blended with a low-Tg polymer to produce a coating that is initially non-tacky, but on irradiation undergoes phase separation as a result of chemical conversion of the acid-sensitive polymer, and becomes tacky. Although the possibility of laser exposure is mentioned, no details are given, and there is no disclosure of IR-sensitivity, only UV/visible. However the same materials were the subject of a paper entitled "Advances in Phototackification" presented as Paper 1912-36 at the 1993 IS & T/SPIE Conference, Symposium on Electronic Science and Technology, in which it was further disclosed that the photoacid generator could be replaced by an IR dye (specifically a squarilium dye with thiopyrylium end groups) and exposure effected with a diode laser device. The dye in question is not known to have acid-generating properties. This technology is the subject of US-P- 5 286 604.

[0016] WO- 92/09934 discloses that an acid-sensitive polymer is optionally blended with one or more photoacid generators. Subsequent to imagewise exposure to UV/visible radiation, the exposed areas are preferentially wettable by water, and the coatings may function as lithographic printing plates requiring no wet processing. There is no disclosure of laser address.

[0017] EP-A- 652 483 discloses a lithographic printing plate requiring no dissolution processing which comprises a substrate bearing a heat-sensitive coating, which coating becomes relatively more hydrophilic under the action of heat. Said system yields a positive working printing plate. An analogous system, however yielding a negative working printing plate is not known.

[0018] DD- 217 914 discloses the preparation of a lithographic plate by irradiation with a laser of a non-light sensitive hydrophilic material, coated on an anodic aluminium support, which can comprise dyes or other additions, wherein the aluminium oxide layer is coloured with a dye, which absorbs at the wavelength of the laser.

[0019] DD- 213 530 discloses a method for the preparation of printing plates for flexographic and lithographic printing by irradiation with a laser of layers comprising spectral sensitizers wherein spectral sensitizers are used whose spectrum changes by irradiation. US-P- 4 034 183 discloses a process for the production of a planographic printing form in which a carrier coated with a hydrophilic layer composed of a non-light-sensitive compound is imagewise exposed, the improvement comprising imagewise exposing the layer to laser radiation of an intensity and for a period such that the exposed areas are rendered hydrophobic and oleophilic, whereby the printing form obtained may be used for printing in a planographic printing machine without further treatment.

[0020] GB-A- 2 203 438 discloses a photosensitive and heat-sensitive polymer having conjugated polyenes and sulfonic acid groups and an absorbance ratio of specified bands of at least 0.6.

[0021] US-P- 4 081 572 discloses a method for preparing a printing master comprising (a) providing a self-supporting master substrate, (b) providing a specific hydrophilic polymer, (c) coating said substrate with said polymer, and (d) selectively thermally converting said polymer to a hydrophobic condition in image configuration.

[0022] JP- 60 132 760 discloses the surface of a plate material comprising an oleophilic polymer which is made hydrophilic to form a non-image part which is, in turn, irradiated with a laser to selectively remove a hydrophilic functional group to obtain the desired printing plate.

## OBJECTS OF THE INVENTION

[0023] It is an object of the invention to provide a non-ablative imaging element for preparing a lithographic printing plate requiring no dissolution processing which is negative working.

[0024] It is also an object of the invention to provide a non-ablative imaging element for preparing a lithographic printing plate requiring no dissolution processing which shows a good ink-uptake in the exposed areas and no scumming in the non-exposed areas.

## SUMMARY OF THE INVENTION

[0025] The above object is realised by a heat-sensitive non-ablatable imaging element for providing a lithographic printing plate as defined in claim 1 with preferred embodiments defined in the dependent claims.

## DETAILED DESCRIPTION OF THE INVENTION

[0026] The imaging element of the present invention comprises a support and an image forming layer as top layer which comprises a heat-switchable binder and optionally a compound capable of converting light into heat. A heat-switchable binder is a polymer or copolymer which under the influence of heat undergoes a polarity transfer from hydrophilic to hydrophobic or vice versa. According to the present invention a switchable binder is used which is hydrophilic before heating and becomes hydrophobic by heating. This surface polarity difference is sufficient to prepare a classical offset printing plate. The heat-switchable binders according to the invention are polymers or copolymers which contain monomeric units comprising two pendant carboxylic acid groups or their salts or half esters, referred to hereinafter as "dicarboxylic monomers". As counter ion can be used sodium, potassium, ammonium, or tetraalkylammonium ion. Also traces of alkali can be used such as traces of triethylamine and pyridine. These hydrophylic functions react under the influence of heat with other functional groups forming a hydrophobic structure.

[0027] A suitable switchable binder for use in the imaging element of the present invention is a binder containing maleic acid; such a binder is hydrophilic and yields under the influence of heat a binder containing maleic anhydride which is more hydrophobic. Other suitable switchable binders are binders containing fumaric acid, itaconic acid, 3-or 4-vinylphthalic acid, cis-1,2,3,6-tetrahydrophthalic acid or cis-5-norbornene-endo-2,3-dicarboxylic acid. Said acids can be mixed in one copolymer. Not only the diacids but also the monoalkyl esters and their salts are suitable. Examples of such half-esters are monobutyl maleate copolymers, mono-isopropyl maleate copolymers, maleic acid 2-butoxy ethyl ester copolymer, maleic acid isobutylester copolymers and maleic acid isooctyl ester copolymers. These halfesters can also be used in combination with another dicarboxylic monomer in one copolymer.

[0028] Not only copolymers obtained by copolymerization of e.g. maleic acid but also polymers derivatives obtained by grafting e.g. maleic acid on unsaturated polyolefines are very suitable switchable polymers.

[0029] The switchable binder according to the invention can be a copolymer which further contains other monomeric units such as an acrylate, a methacrylate, a vinyl halide, a vinyl ester, a vinyl ether such as n-butyl-, isobutyl-, and 2-chloroethyl vinyl ether and olefines such as propylene, isobutylene and 1-octadecene. More preferably is a compound selected from the group consisting of methyl vinyl ether copolymer, ethene copolymer and styrene copolymer. Most preferably said binder is a copolymer containing maleic acid and vinyl methyl ether.

[0030] The ratio of the dicarboxylic monomer to comonomer can be 100:0 to 20:80, or sufficient for its structure or state (i.e. anhydride or otherwise) to affect the overall solubility of the top layer. Typically the ratio is near 50:50 due to a tendency toward alternating copolymerization. The molecular weight is generally between 5,000 up to 70,000 weight average molecular weight, preferably between 10,000 and 40,000 g/mol.

[0031] The image forming layer may comprise more than one switchable polymer although that is not preferred. The image forming layer may also comprise a further binder to enhance the hydrophilic or hydrophobic properties of said layer.

[0032] As hydrophilic binder there may be used hydrophilic (co)polymers such as for example, homopolymers and copolymers of acrylamide, methylol acrylamide, methylol methacrylamide, acrylic acid, methacrylic acid, hydroxyethyl acrylate, hydroxyethyl methacrylate or maleic anhydride/vinylmethylether copolymers. The hydrophilicity of the (co) polymer or (co)polymer mixture used is preferably the same as or higher than the hydrophilicity of polyvinyl acetate hydrolyzed to at least an extent of 60 percent by weight, preferably 80 percent by weight. A preferred hydrophilic binder is polyvinylalcohol.

[0033] As hydrophobic binder there may be used a water insoluble polymer such as a cellulose ester, a copolymer of vinylidene chloride and acrylonitrile, poly(meth)acrylates and polyvinylchloride. Preferred hydrophobic binders are hydrophobic binders as used in conventional positive or negative working PS-plates e.g. novolac, polyvinyl phenols, carboxy substituted polymers etc. Typical examples of these polymers are described in DE-A- 4 007 428, DE-A- 4 027 301 and DE-A- 4 445 820.

[0034] The image forming layer or a layer just underlying said layer preferably includes a compound capable of converting light into heat. Suitable compounds capable of converting light into heat are preferably infrared absorbing components although the wavelength of absorption is not of particular importance as long as the absorption of the compound used is in the wavelength range of the light source used for image-wise exposure. Particularly useful compounds are for example dyes and in particular infrared absorbing dyes and pigments and in particular infrared absorbing pigments. Examples of infrared absorbing dyes are disclosed in EP-A- 97 203 131.4. Examples of infrared absorbing pigments are carbon black, metal carbides, borides, nitrides, carbonitrides, bronze-structured oxides and oxides structurally related to the bronze family but lacking the A component e.g.  $\text{WO}_2$ . It is also possible to use conductive polymer dispersion such as polypyrrole or polyaniline-based conductive polymer dispersions. Said compound capable of converting light into heat is preferably present in the top layer but can also be included in an underlying layer.

[0035] It is clear that said compound capable of converting light into heat is necessarily present in the imaging element according to the invention when said imaging element is imaged by exposure with light.

[0036] Said compound capable of converting light into heat is present in the imaging element preferably in an amount

between 1 and 25 % by weight of the total weight of the image forming layer, more preferably in an amount between 2 and 20 % by weight of the total weight of the image forming layer. The compound capable of converting light into heat is most preferably present in the imaging element in an amount to provide an optical density at a wavelength between 800 nm and 1100nm of at least 0.35.

[0037] Furthermore this IR-sensitive layer is preferably a visible light- and UV-light desensitised layer. This preferably visible light- or UV-light desensitised layer does not comprise photosensitive ingredients such as diazo compounds, photoacids, photoinitiators, quinone diazides, sensitisers etc. which absorb in the wavelength range of 250nm to 650nm. In this way a daylight stable printing plate can be obtained.

[0038] The image forming layer is preferably applied in an amount between 0.1 and 10 g/m<sup>2</sup>, more preferably in an amount between 0.5 and 5 g/m<sup>2</sup>.

[0039] The support may be as well a hydrophobic as a hydrophilic support and as well a rigid as a flexible support.

[0040] In the imaging element according to the present invention, the support can be an anodised aluminum. A particularly preferred support is an electrochemically grained and anodised aluminum support.

[0041] According to another embodiment in connection with the present invention, the support is a flexible support, such as paper or plastic film. As flexible support in connection with the present invention it is particularly preferred to use a plastic film e.g. substrated polyethylene terephthalate film, cellulose acetate film, polystyrene film, polycarbonate film etc.... The plastic film support may be opaque or transparent.

[0042] It is particularly preferred to use a polyester film support to which an adhesion improving layer has been provided. Particularly suitable adhesion improving layers for use in accordance with the present invention comprise a hydrophilic binder and colloidal silica as disclosed in EP-A- 619 524, EP-A- 620 502 and EP-A- 619 525. Preferably, the amount of silica in the adhesion improving layer is between 200 mg per m<sup>2</sup> and 750 mg per m<sup>2</sup>. Further, the ratio of silica to hydrophilic binder is preferably more than 1 and the surface area of the colloidal silica is preferably at least 300 m<sup>2</sup> per gram, more preferably at least 500 m<sup>2</sup> per gram.

[0043] Between the support and the top layer the imaging element can contain other layers such as subbing layers and antihalo layers.

[0044] Irrespectively if the imaging element contains a dye according to the invention or not, the imaging element optionally contains between the support and the top layer a reflective layer. Said reflective layer can be any layer which reflects the IR-irradiation but is preferably aluminum with a high visual density e.g. vacuum deposited aluminum.

[0045] The imaging element can be prepared by applying the different layers according to any known technique. Alternatively said imaging element may be prepared on the press with the support already on the press by a coater or coaters placed in the immediate vicinity of the press.

[0046] Imaging in connection with the present invention can be done with a thermal head. Preferably an image-wise scanning exposure is used involving the use of a laser, more preferably of a laser that operates in the infrared or near-infrared, i.e. wavelength range of 700-1500 nm. Most preferred are laser diodes emitting in the near-infrared. Exposure of the imaging element can be performed with lasers with a short as well as with lasers with a long pixel dwell time. Preferred are lasers with a pixel dwell time between 0.005 µs and 20 µs.

[0047] After the exposure the imaging element is ready to be used as a lithographic printing plate.

[0048] In another embodiment of the invention the exposure of the imaging element can be carried out with the imaging element already on the press. A computer or other information source supplies graphics and textual information to the printhead or a laser via a lead.

[0049] The printing plate of the present invention can also be used in the printing process as a seamless sleeve printing plate. This cylindrical printing plate which has as diameter the diameter of the print cylinder is slid on the print cylinder instead of applying in a classical way a classically formed printing plate. More details on sleeves are given in "Grafisch Nieuws" ed. Keesing, 15, 1995, page 4 to 6.

[0050] The following examples illustrate the present invention without limiting it thereto. All parts and percentages are by weight unless otherwise specified.

#### EXAMPLES 1


[0051] 0.35 g of GANTREZ AN 139 BF, (a copolymer of vinylmethylether, maleic acid and maleic acid anhydride, commercially available from GAF, USA) and 0.0365 g of IR-absorbing dye IR-1 are dissolved in 4.5 g of a solvent mixture consisting for 44% of THF, 34 % of methoxypropanol and 22 % of methyl ethyl ketone. Said solution was coated onto an aluminum substrate to a wet coating thickness of 16 µm resulting after drying in a dry layer with a thickness of 1.15 g/m<sup>2</sup>.

[0052] This imaging element was exposed on a CREO 3244 Trendsetter (tradename of CREO, Canada) at 2400 dpi, operating at a drum speed of 40 rpm and a laser output of 11 watt.

[0053] After exposing the imaging element a printing plate is obtained, which was used to print on a GTO 52 press (trade name of Heidelberg Germany) using K + E 197 ink (trade name of Kast und Ehringer, Germany) and a fountain

solution comprising 5 % G648 (trade name of Agfa-Gevaert, Belgium) and 10 % isopropyl alcohol. Good prints were obtained, i.e. prints with good ink-uptake in the exposed areas and no scumming in the non-exposed areas.

IR-1

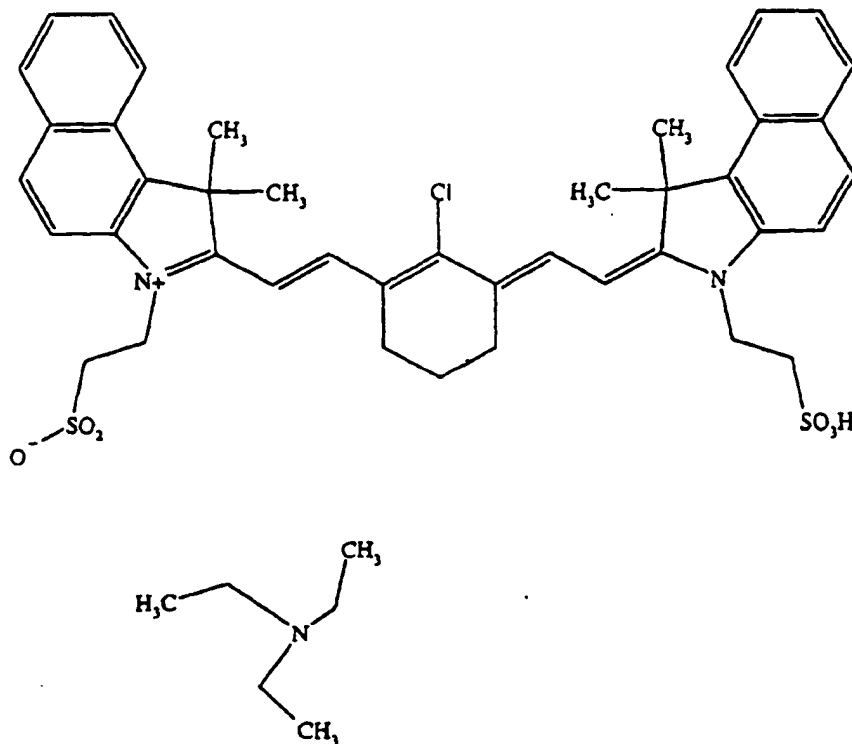

## EXAMPLE 2

[0054] 0.35 g of GANTREZ AN 139 BF (a copolymer of vinylmethylether, maleic acid and maleic acid anhydride, commercially available from GAF, USA) and 0.0365 g of IR-absorbing dye IR-1 are dissolved in 4.5 g of a solvent mixture consisting for 44% of THF, 34 % of methoxypropanol and 22 % of methyl ethyl ketone. Said solution was coated onto a subbed polyethylene terephthalate substrate to a wet coating thickness of 16  $\mu\text{m}$  resulting after drying in a dry layer with a thickness of 1.15  $\text{g}/\text{m}^2$ .

[0055] This imaging element was exposed on a CREO 3244 Trendsetter (tradename of CREO, Canada) at 2400 dpi, operating at a drum speed of 40 rpm and a laser output of 11 watt.

[0056] After exposing the imaging element a printing plate is obtained, which was used to print on a GTO 52 press (trade name of Heidelberg Germany) using K + E 197 ink (trade name of Kast und Ehringer, Germany) and a fountain solution comprising 5 % G648 (trade name of Agfa-Gevaert, Belgium) and 10 % isopropyl alcohol. Good prints were obtained, i.e. prints with good ink-uptake in the exposed areas and no scumming in the non-exposed areas.

## Claims

1. A heat-sensitive non-ablatable imaging element for providing a lithographic printing plate, which requires no dissolution processing, the imaging element having on a support as top layer an image forming layer comprising a heat-switchable hydrophilic binder which becomes more hydrophobic under the influence of heat, said heat-switchable binder being a (co)polymer containing monomeric units selected from the group consisting of maleic acid, fumaric acid, itaconic acid, 3-or 4-vinylphthalic acid, cis-1,2,3,6-tetrahydrophthalic acid, cis-5-norbornene-endo-2,3-dicarboxylic acid and their half esters.

2. An imaging element according to claim 1 wherein said heat-switchable hydrophilic binder is a copolymer further containing monomeric units selected from the group consisting of vinyl methyl ether, ethene and styrene.
3. An imaging element according to claim 1 or 2 further comprising a compound capable of converting light to heat.
4. An imaging element according to claim 3 wherein said compound capable of converting light to heat is an infrared absorbing dye.
5. An imaging element according to claim 3 wherein said compound capable of converting light to heat is an infrared absorbing pigment.
6. An imaging element according to claim 3 wherein the compound capable of converting light to heat is present in an amount of 1 to 25 % by weight of the total weight of the image forming layer.
7. An imaging element according to claim 3 wherein the compound capable of converting light to heat is present in an amount to provide an optical density between the wavelengths of 800 nm to 1100 nm of at least 0.35.
8. A method for providing a lithographic plate by imaging an imaging element according to any of claims 1 to 7.

#### Patentansprüche

1. Ein wärmeempfindliches nicht-ablatierbares Bilderzeugungselement zur Herstellung einer lithografischen Druckplatte, die keine auflösende Verarbeitung erfordert, wobei das Bilderzeugungselement auf einem Träger als Deckschicht eine bilderzeugende Schicht mit einem thermisch schaltbaren hydrophilen Bindemittel enthält, wobei das thermisch schaltbare Bindemittel unter der Einwirkung von Wärme hydrophober gemacht wird und ein (Co)polymer ist, das Monomereinheiten aus der Gruppe bestehend aus Maleinsäure, Fumarsäure, Itakonsäure, 3- oder 4-Vinylphthalsäure, Cis-1,2,3,6-tetrahydrophthalsäure, Cis-5-norbornendo-2,3-dicarbonsäure und deren daraus'gebildeten Halbestern enthält.
2. Ein Bilderzeugungselement nach Anspruch 1, dadurch gekennzeichnet, daß das thermisch schaltbare hydrophile Bindemittel ein Copolymer ist, das weiterhin Monomereinheiten aus der Gruppe bestehend aus Vinylmethylether, Ethen und Styrol enthält.
3. Ein Bilderzeugungselement nach Anspruch 1 oder 2, das weiterhin eine Licht in Wärme umwandelnde Verbindung enthält.
4. Ein Bilderzeugungselement nach Anspruch 3, dadurch gekennzeichnet, daß die Licht in Wärme umwandelnde Verbindung ein infrarotabsorbierender Farbstoff ist.
5. Ein Bilderzeugungselement nach Anspruch 3, dadurch gekennzeichnet, daß die Licht in Wärme umwandelnde Verbindung ein infrarotabsorbierendes Pigment ist.
6. Ein Bilderzeugungselement nach Anspruch 3, dadurch gekennzeichnet, daß die Licht in Wärme umwandelnde Verbindung in einer Menge zwischen 1 und 25 Gew.-%, bezogen auf das Gesamtgewicht der bilderzeugenden Schicht, im Bilderzeugungselement enthalten ist.
7. Ein Bilderzeugungselement nach Anspruch 3, dadurch gekennzeichnet, daß die Licht in Wärme umwandelnde Verbindung in einer solchen Menge im bilderzeugenden Element enthalten ist, daß im Wellenlängenbereich zwischen 800 nm und 1.100 nm eine optische Dichte von zumindest 0,35 erhalten wird.
8. Ein Verfahren zur Herstellung einer lithografischen Druckplatte durch Bebilderung eines Bilderzeugungselements nach einem der Ansprüche 1 bis 7.

#### Revendications

1. Élément de formation d'image thermosensible inapte à l'ablation pour procurer un cliché d'impression lithographi-

- que qui ne requiert aucun traitement de dissolution, l'élément de formation d'image possédant, sur un support, à titre de couche de protection, une couche de formation d'image comprenant un liant hydrophile commutable à la chaleur qui devient plus hydrophobe sous l'influence de la chaleur, ledit liant commutable à la chaleur étant un (co)polymère contenant des unités monomères choisies parmi le groupe constitué par l'acide maléique, l'acide fumarique, l'acide itaconique, l'acide 3- ou 4-vinylphthalique, l'acide cis-1,2,3,6-tétrahydrophthalique, l'acide cis-5-norbornène-endo-2,3-dicarboxylique et leurs demi-esters.
2. Élément de formation d'image selon la revendication 1, dans lequel ledit liant hydrophile commutable à la chaleur est un copolymère contenant en outre des unités monomères choisies parmi le groupe constitué par l'éther vinyl-méthyllique, l'éthène et le styrène.
  3. Élément de formation d'image selon la revendication 1 ou 2, comprenant en outre un composé capable de transformer de la lumière en chaleur.
  4. Élément de formation d'image selon la revendication 3, dans lequel ledit composé capable de transformer de la lumière en chaleur est un colorant absorbant dans le domaine infrarouge du spectre.
  5. Élément de formation d'image selon la revendication 3, dans lequel ledit composé capable de transformer de la lumière en chaleur est un pigment absorbant dans le domaine infrarouge du spectre.
  6. Élément de formation d'image selon la revendication 3, dans lequel ledit composé capable de transformer de la lumière en chaleur est présent à concurrence de 1 à 25 % en poids du poids total de la couche de formation d'image.
  7. Élément de formation d'image selon la revendication 3, dans lequel ledit composé capable de transformer de la lumière en chaleur est présent en une quantité telle qu'il procure une densité optique, entre les longueurs d'ondes de 800 à 1100, d'au moins 0,35.
  8. Procédé pour procurer un cliché lithographique en transformant en image un élément de formation d'image selon l'une quelconque des revendications 1 à 7.